


Power "on"

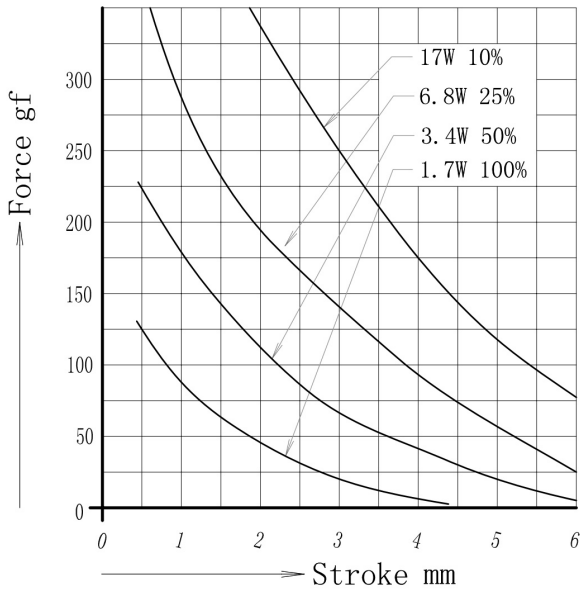

- Frame Size: 30*15*10mm
- Plunger: ϕ 5.0
- Power : 1.7-17W
- Voltage: DC6-48V
- Current: 0.14-2.83A
- Stroke: 0-7mm
- Force: 0-350gf
- Move Type: Pull
- Life Expectancy: >1000K cycles

duty cycle=100% x $\frac{\text{"on" time}}{\text{"on" time} + \text{"off"}}$	100%	50%	25%	10%
Max. "on" time in seconds	∞	50	18	2
watts at 20°C	1.7	3.4	6.8	17
type no. (** : resistance)	(volts DC) resistance $\Omega \pm 10\%$ at 20°C			
SDO-0530L-06A**	(6V) 21.2	(6V) 10.6	(6V) 5.3	(6V) 2.1
SDO-0530L-12A**	(12V) 84.7	(12V) 42.4	(12V) 21.2	(12V) 8.5
SDO-0530L-24A**	--	(24V) 169.4	(24V) 84.7	(24V) 33.9
SDO-0530L-48A**	--	--	--	(48V) 135.5

SHENZHEN ZANTY ELECTRONICS CO., LTD.

Address: 4th Floor, Building 1, Lianchuang Science and Technology Park, No. 21 Bulan Road, Nanwan Street, Longgang District, Shenzhen, Guangdong, China

Email: sales@zanty.com

Website: www.zanty.com